


Prof.(m)	N(colpi p)	Rpd(kg/cm²)	N(colpi r)	asta	Prof.(m)	N(colpi p)	Rpd(kg/cm²)	N(colpi r)	asta
0.00 - 0.10	1	3.6	----	1	3.40 - 3.50	19	61.1	----	4
0.10 - 0.20	1	3.6	----	1	3.50 - 3.60	16	51.4	----	4
0.20 - 0.30	2	7.2	----	1	3.60 - 3.70	17	54.6	----	4
0.30 - 0.40	1	3.6	----	1	3.70 - 3.80	18	57.9	----	4
0.40 - 0.50	5	18.0	----	1	3.80 - 3.90	18	55.9	----	5
0.50 - 0.60	7	25.2	----	1	3.90 - 4.00	16	49.7	----	5
0.60 - 0.70	10	36.0	----	1	4.00 - 4.10	16	49.7	----	5
0.70 - 0.80	11	39.6	----	1	4.10 - 4.20	15	46.6	----	5
0.80 - 0.90	11	38.1	----	2	4.20 - 4.30	12	37.2	----	5
0.90 - 1.00	12	41.5	----	2	4.30 - 4.40	12	37.2	----	5
1.00 - 1.10	16	55.4	----	2	4.40 - 4.50	12	37.2	----	5
1.10 - 1.20	16	55.4	----	2	4.50 - 4.60	18	55.9	----	5
1.20 - 1.30	12	41.5	----	2	4.60 - 4.70	18	55.9	----	5
1.30 - 1.40	12	41.5	----	2	4.70 - 4.80	19	59.0	----	5
1.40 - 1.50	13	45.0	----	2	4.80 - 4.90	21	63.0	----	6
1.50 - 1.60	9	31.2	----	2	4.90 - 5.00	21	63.0	----	6
1.60 - 1.70	6	20.8	----	2	5.00 - 5.10	20	60.0	----	6
1.70 - 1.80	4	13.8	----	2	5.10 - 5.20	19	57.0	----	6
1.80 - 1.90	4	13.3	----	3	5.20 - 5.30	18	54.0	----	6
1.90 - 2.00	3	10.0	----	3	5.30 - 5.40	17	51.0	----	6
2.00 - 2.10	4	13.3	----	3	5.40 - 5.50	15	45.0	----	6
2.10 - 2.20	5	16.7	----	3	5.50 - 5.60	16	48.0	----	6
2.20 - 2.30	5	16.7	----	3	5.60 - 5.70	16	48.0	----	6
2.30 - 2.40	9	30.0	----	3	5.70 - 5.80	15	45.0	----	6
2.40 - 2.50	11	36.7	----	3	5.80 - 5.90	15	43.5	----	7
2.50 - 2.60	10	33.3	----	3	5.90 - 6.00	14	40.6	----	7
2.60 - 2.70	11	36.7	----	3	6.00 - 6.10	16	46.5	----	7
2.70 - 2.80	11	36.7	----	3	6.10 - 6.20	15	43.5	----	7
2.80 - 2.90	10	32.1	----	4	6.20 - 6.30	18	52.3	----	7
2.90 - 3.00	10	32.1	----	4	6.30 - 6.40	25	72.6	----	7
3.00 - 3.10	10	32.1	----	4	6.40 - 6.50	23	66.8	----	7
3.10 - 3.20	10	32.1	----	4	6.50 - 6.60	21	61.0	----	7
3.20 - 3.30	7	22.5	----	4	6.60 - 6.70	19	55.2	----	7
3.30 - 3.40	12	38.6	----	4	6.70 - 6.80	50	145.2	----	7

N = N(10) numero di colpi penetrazione punta - avanzamento $\delta = 10$

Rpd (kg/cm²)

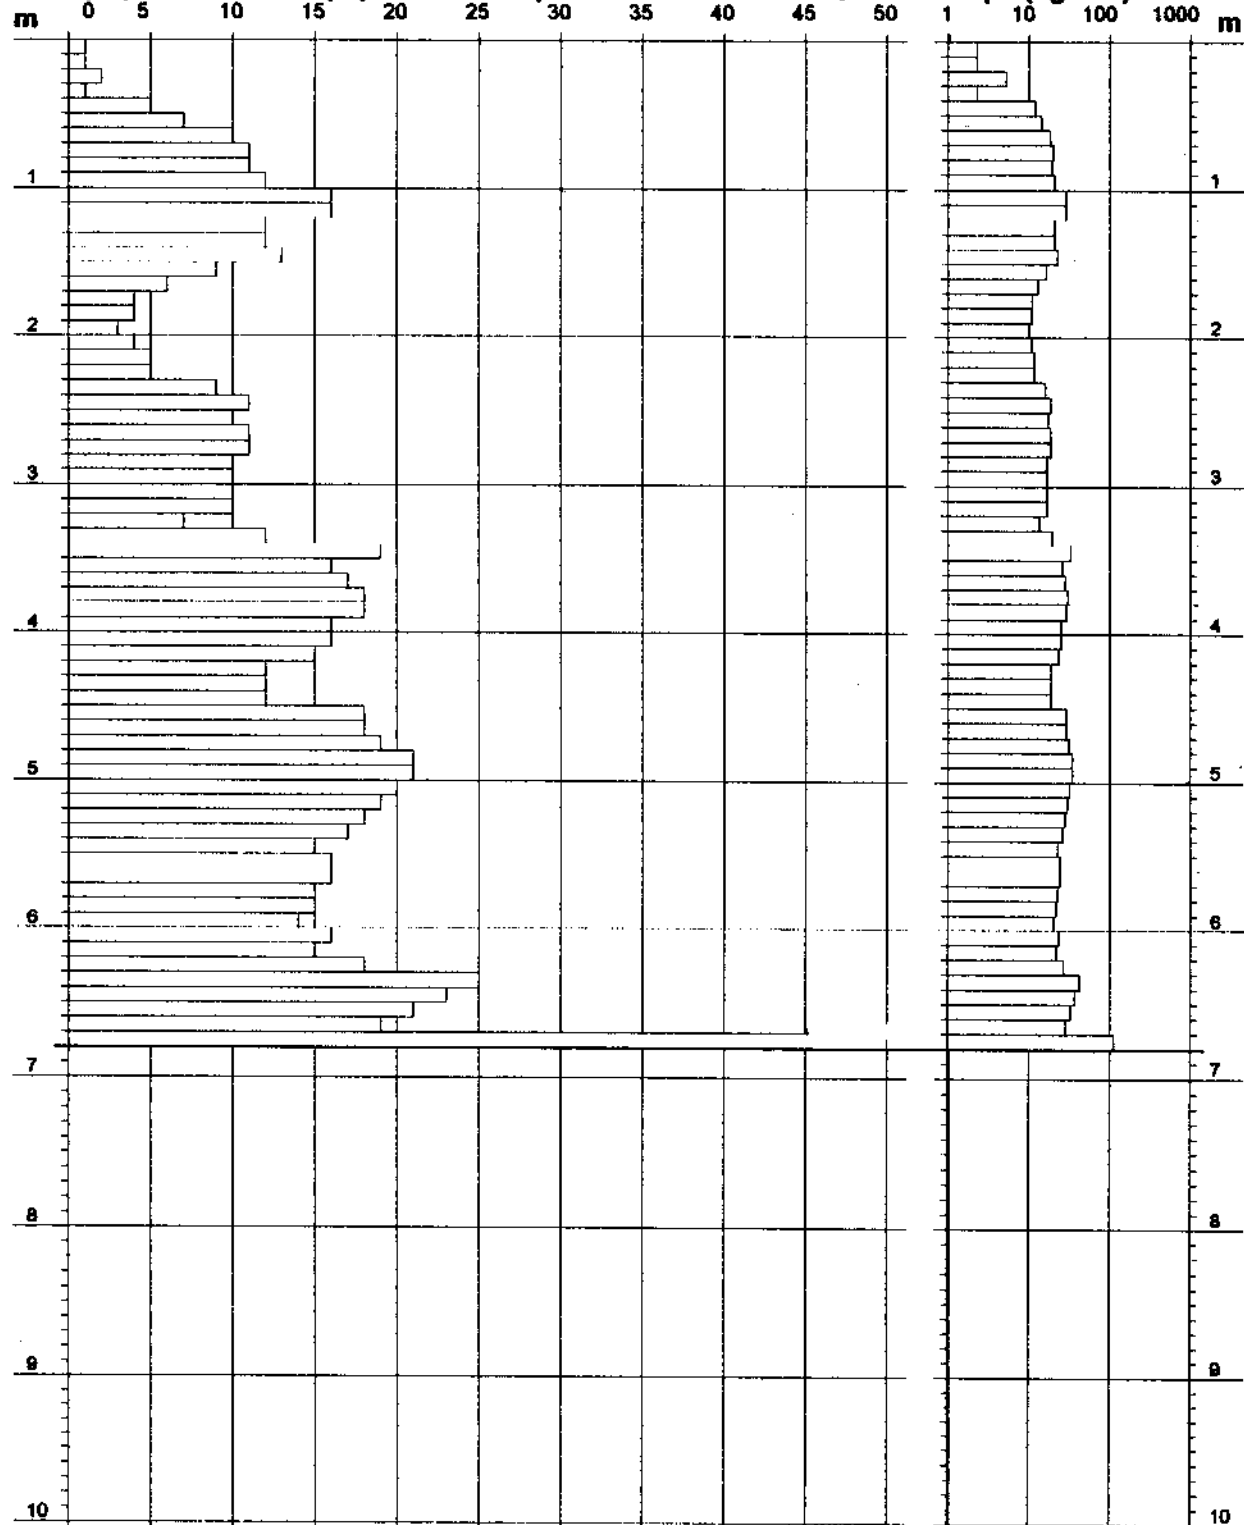

- PENETROMETRO DINAMICO tipo : DL-30 (90°)

- M (massa battente)= 30.00 kg - H (altezza caduta)= 0.20 m

- A (area punta)= 10.00 cm² - D(diam. punta)= 35.70 mm

- Numero Colpi Punta $N = N(10)$ [$\delta = 10$ cm]

- Uso rivestimento / fanghi iniezione : NO